


# SEAT BACK PLATES

UNIVERSAL SEAT HEIGHT ADJUSTMENTS



### UNIV SPL-1 KIT

Club Car DS 2000+ (C2)  
EZGO TXT (TX)  
Yamaha Drive

**IMPORTANT: Do not fully tighten hardware until instructed.  
Read through all instructions before beginning installation.**

## SEAT BACK PLATES INSTALLATION


### TABLE OF CONTENTS:

- Section 1** - 2-Passenger Plate Installation (For Star see pg 4)
- Section 2** - 4-Passenger Plate Installation (For Star see pg 4)
- Section 3** - Seat Back Cushion Installation

### PREPARE CAR FOR INSTALLATION:

- 2P: Remove Factory Cushions
- 4P: Remove Top, Rear Frames and Seat Back Support/Sweater Basket Assembly. Install DoubleTake® Rear Seat Kit.

**NOTE: Save original Hardware for later use.**

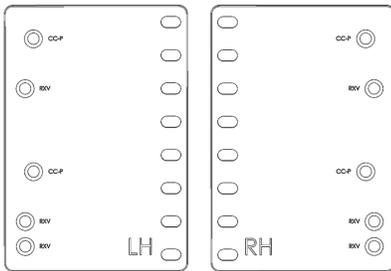

### UNIV SPL-2 KIT

Club Car Precedent (PD)  
EZGO RXV (RX)

**NOTE: For Star mounting, see pg 4.**

## SECTION 1


### 2-PASSENGER PLATE INSTALLATION

For 4-Passenger installation, skip to Section 2

#### Club Car DS 2000+: 2-Passenger Factory Supports

Attach the Seat Back Plates to the Seat Back Supports using a 1/4" x 1-3/4" FHP Bolt, a 1/4" Flat Washer (back), and a 1/4" Nyloc Nut (2x both sides through holes marked CC-DS).


**NOTE: Fully tighten Bolts.**



Club Car DS

#### Club Car Precedent: 2-Passenger Factory Supports


**NOTE: The Seat Back Plates do not work with Precedent Factory Seat Back Supports.**




#### DoubleTake® Seat Back Cushion Install (Factory Seat Back Supports)

Install Mounting Clips to the cushion back where indicated (A). Mount Seat Back Cushion to factory seat back supports the same way the factory cushion mounts.

**NOTE: Fully tighten Bolts.**



Precedent Mounting Clips

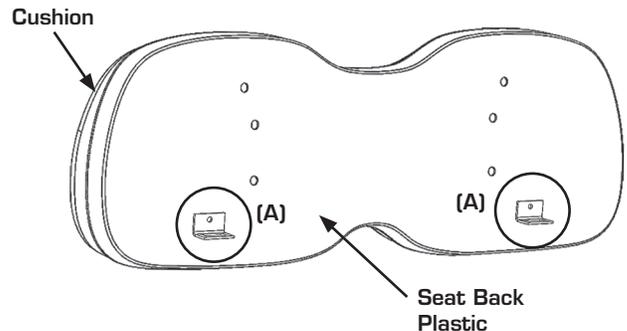


**PROCEED TO SECTION 3**

**EZGO TXT: 2-Passenger Factory Supports**

Attach the Seat Back Plates to the Seat Back Supports using 1/4" x 1-3/4" FHP Bolt, 1/4" Flat Washer (back), and 1/4" Nyloc Nut (2x both sides – through holes marked TXT).

**NOTE: Fully tighten Bolts.**



EZGO TXT




**PROCEED TO SECTION 3**




**Yamaha Drive: 2-Passenger Factory Supports**

Attach the Seat Back Plates to the Seat Back Supports using 1/4" x 2-1/4" FHP Bolt, Black Spacer (A), 1/4" Flat Washer (back), and 1/4" Nyloc Nut (2x both sides – through holes marked Drive).

**NOTE: Fully tighten Bolts.**



Yamaha Drive

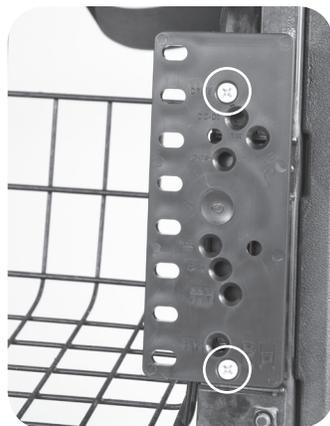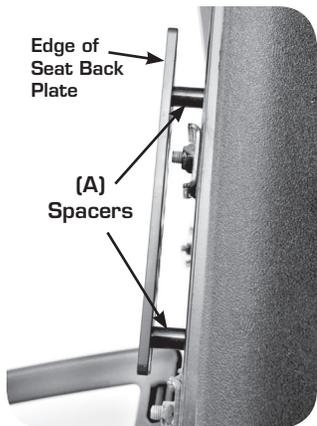


**PROCEED TO SECTION 3**


**EZGO RXV: 2-Passenger Factory Supports**

Temporarily remove the Bag Holder/Sweater Basket Assembly from the Seat Back Supports by removing the 6 Bolts (3 Bolts each side) as shown below (A).

**NOTE: Keep Hardware for reinstall.**




EZGO RXV

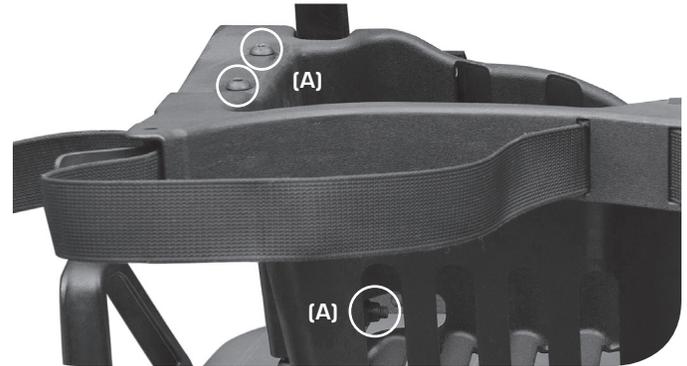


Attach the Universal Seat Back Plates to the Seat Back Supports using 1/4" x 1-3/4" FHP Bolt, 1/4" Flat Washer (back), and 1/4" Nyloc Nut (2x both sides – through top and bottom holes marked RXV).

**NOTE: Fully tighten Hardware.**

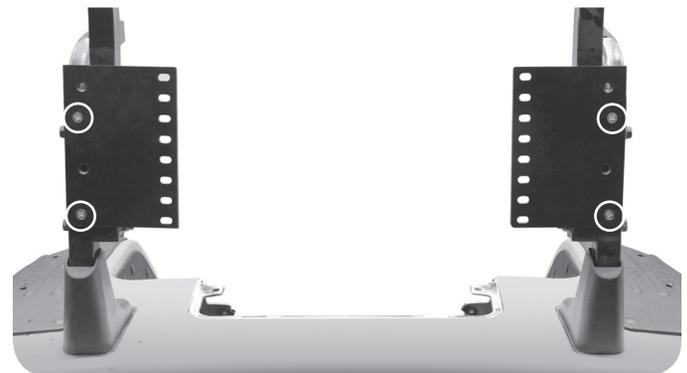

Install Seat Back Cushion (A) to Seat Plates (see Section 3 for example). Then, complete your installation by reinstalling the Bag Holder/Sweater Basket Assembly using the factory hardware (B).

**NOTE: Fully tighten allBolts.**

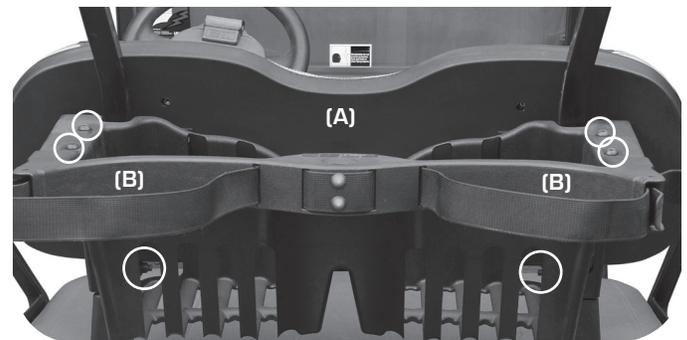

**INSTALLATION IS COMPLETE**


# SECTION 2

## 4-PASSENGER PLATE INSTALLATION

### Club Car Precedent: 4-Passenger DoubleTake Supports


Attach the Seat Back Plates to the front of the Seat Back Supports through top holes marked CC-P using 1/4" x 1-1/4" FHP Bolt, Black Spacer Washer (A), 1/4" Flat Washer (back), and 1/4" Nyloc Nut. Repeat for other side.

For the bottom holes marked CC-P use 1/4" x 1-1/4" FHP Bolt, 1/4" Flat Washer (back), and 1/4" Nyloc Nut.




Club Car Precedent

#### DoubleTake® Seat Back Cushion Install (Use Seat Back Plates with spacer washers)

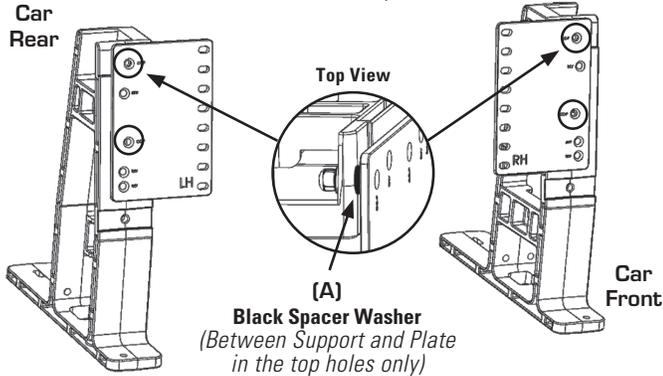


#### Factory Seat Back Cushion Install (Use Precedent Tab Set - Seat Back Plates not required)

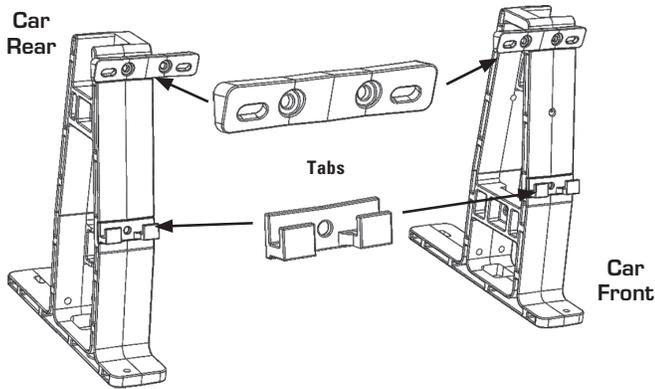

Attach the Seat Back Plates to the rear Seat Back Supports using 1/4" x 1-1/4" FHP Bolt, 1/4" Flat Washer (back), and 1/4" Nyloc Nut (2x both sides through holes marked CC-P).

#### Rear Seat Back Plate Install (No Spacer Washer Required)

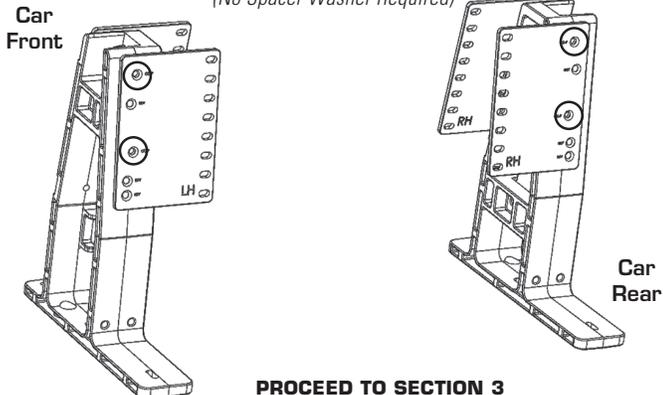


**PROCEED TO SECTION 3**


### Club Car DS 2000+: 4-Passenger DoubleTake Supports

Attach the Seat Back Plates to the Seat Back Supports (front and back) using 1/4" x 1-1/4" FHP Bolt, 1/4" Flat Washer (back), and 1/4" Nyloc Nut (2x both sides – through holes marked CC-DS).

**NOTE: Repeat for Seat Back Plates on opposite side of supports. Fully tighten Bolts.**



Club Car DS

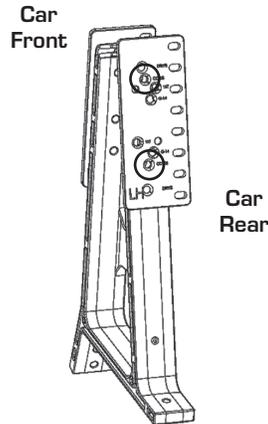


**PROCEED TO SECTION 3**


### Yamaha Drive: 4-Passenger DoubleTake Supports

Attach the Seat Back Plates to the Seat Back Supports using 1/4" x 2-1/4" FHP Bolt, 1/4" Flat Washer (back), and 1/4" Nyloc Nut (2x both sides – through holes marked Drive).

**NOTE: Black Spacers (4) are for installing on Factory Seat Back Supports only (2-passenger). Fully tighten Bolts.**



Yamaha Drive  
Front & Rear

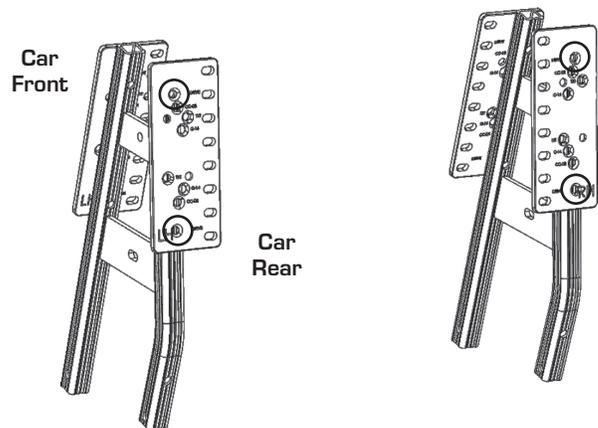


**PROCEED TO SECTION 3**

**EZGO RXV: 4-Passenger DoubleTake Supports**


Attach the front Seat Back Plates to the Seat Back Supports using a 1/4" x 1-3/4" FHP Bolt, a 1/4" Flat Washer (back), and a 1/4" Nyloc Nut (2x both sides – through top and bottom holes marked RXV).

**NOTE: Fully tighten Bolts.**




EZGO RXV Front

**Front Seat Back Plate Install**

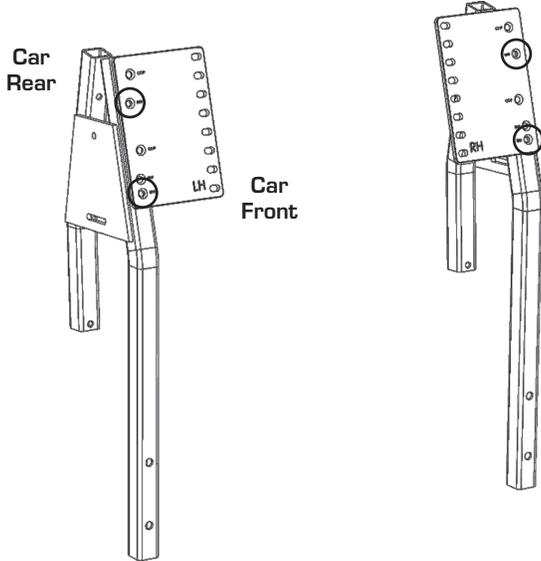


Attach the Rear Seat Back Plates to the Seat Back Supports using a 1/4" x 1-3/4" FHP Bolt, a 1/4" Flat Washer (back), and a 1/4" Nyloc Nut (2x both sides – through the upper set of holes marked RXV).

**NOTE: Fully tighten Bolts.**



EZGO RXV Rear

**Rear Seat Back Plate Install**

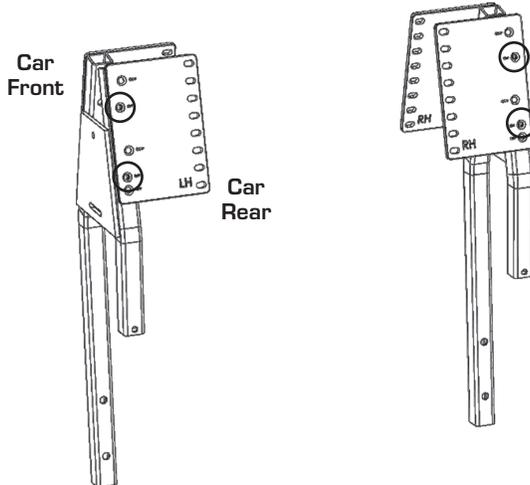


**PROCEED TO SECTION 3**


**EZGO TXT / Star: 4-Passenger DoubleTake Supports**

Attach the Front Seat Back Plates to the Seat Back Supports using a 1/4" x 1-3/4" FHP Bolt, a 1/4" Flat Washer (back), and a 1/4" Nyloc Nut (2x both sides – through holes marked TXT).


**NOTE: Repeat for Seat Back Plates on opposite side of supports. Fully tighten Bolts.**



EZGO TXT Front & Rear



Star Front & Rear (Holes are not labeled)

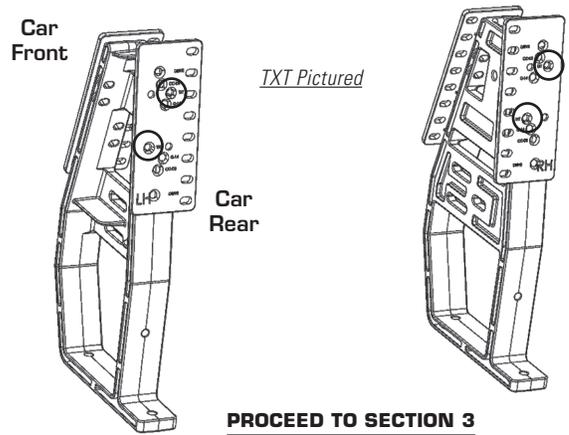

**SECTION 3**

**SEAT BACK CUSHION INSTALLATION**

**All Car Models**

Mount the Seat Back Cushions to the Seat Back Plates (Club Car Precedent shown as example). Install the Threaded Studs (4) into the Seat Back Cushion where indicated (A). Determine the Seat Back Cushion height preferred and mount Cushion to Seat Back Plates thru corresponding slotted holes (B). Secure the Cushion using a 1/4" Flat Washer and a 1/4" Nyloc Nut (2x both sides). Repeat for opposite Seat Back Cushion.

**NOTE: Fully tighten all Bolts.**

