

SHORT TRACK TOP™



2-PASSENGER TOP KITS

**IMPORTANT: Do not fully tighten hardware until instructed.
Read through all instructions before beginning installation.**



REAR FRAME INSTALLATION

NOTE: Kits include Rear Frames and Front Frame Brackets where applicable.

TABLE OF CONTENTS:

- Step 1** - Install Front Frame Brackets
- Step 2** - Install Rear Frames
- Step 3** - Install Top

PREPARE CAR FOR INSTALLATION:

- Remove the following:
- Factory Top
 - Top Supports/Drain Tubes
 - Bench Back Cushion
 - Bag Rack Assembly

NOTE: Save original hardware for later use.

STEP 1

INSTALL FRONT FRAME BRACKETS

(SEE INSTRUCTIONS INCLUDED WITH FRONT FRAME BRACKET KIT.)

STEP 2

INSTALL REAR FRAMES

Find your specific make and model of Golf Car below.


Club Car Precedent

Locate the Driver & Passenger Side Rear Frame Brackets. Insert the Brackets into the open slots, in the Sweater Basket/Seat Back Support Housing where the Factory Rear Frame/Rain Gutter Columns were removed. Make sure the Bracket is facing to the rear and that the flush side of the Screw insert is facing towards the inside of the Car. Insert the Factory Bolts back thru the holes from where they were removed and into the Screw inserts in the Rear Frame Bracket. Repeat for opposite side.

NOTE: The Bolts may be difficult to get started, because they have to be started "blind". Make sure not to get the Bolts cross-threaded.

Passenger


Driver

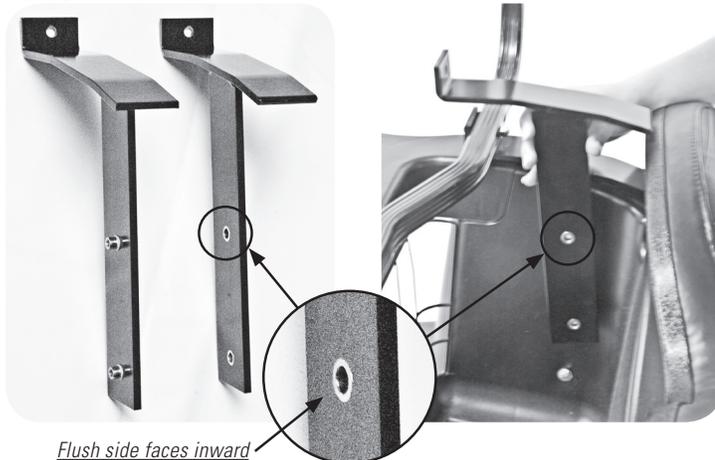

NOTE: The Bracket pictured is not installed in the open slot, as it should be. It is being used to illustrate how the Screw inserts should be facing.

Locate the Rear Frame over the Sweater Basket as indicated, with the offset bend in the bottom facing to the Rear and the Bent Short Legs at the top facing forward. Install the provided hardware through existing holes.

NOTE: Fully tighten Bolts

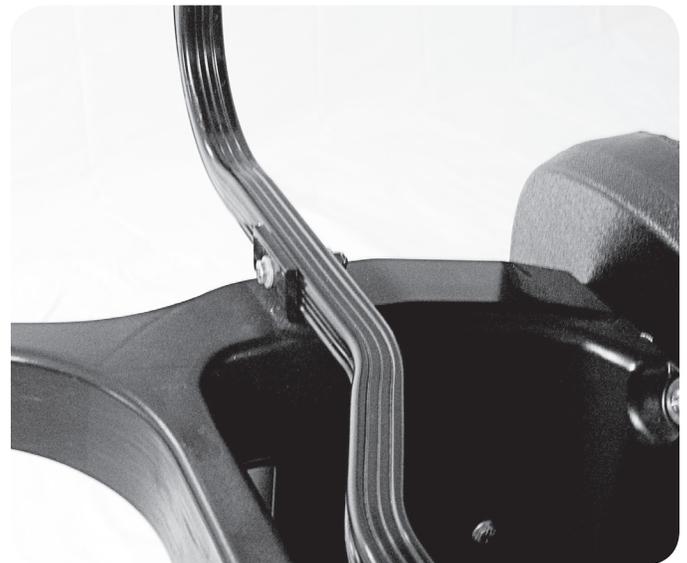


PROCEED TO STEP 3

Club Car DS

Locate the Rear Frame over the Sweater Basket as indicated, with the offset bend in the bottom facing to the Rear and the Bent Short Legs at the top facing forward. Install the provided hardware through existing holes.

NOTE: Fully tighten Bolts.

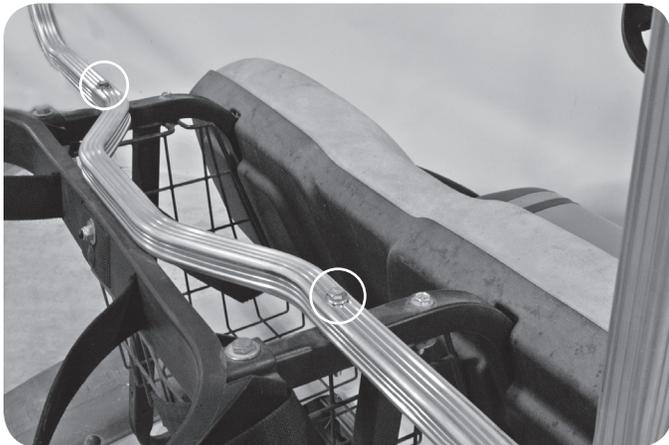


PROCEED TO STEP 3

EZGO RXV

Locate the Rear Frame over the Sweater Basket as indicated, with the bent short legs at the top facing forward. Use 2 Factory Bolts that were removed from the Factory Top to install the Rear Frame to the Sweater Basket.

NOTE: The Rear Frame will be slightly angled forward. Fully tighten Bolts.

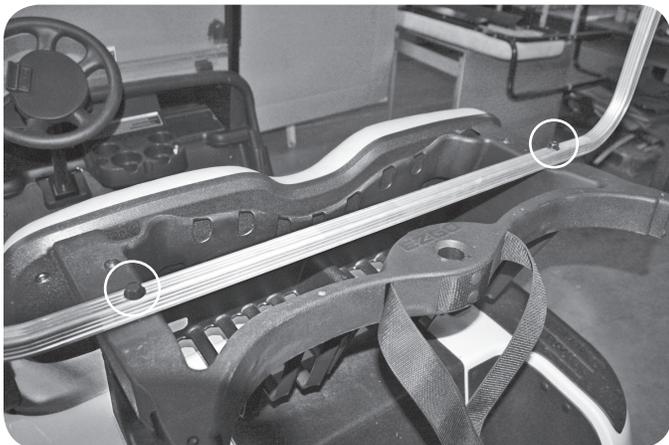

PROCEED TO STEP 3

EZGO TXT

Remove bolts from the bag cradle where shown. Mount the Rear Frame Brackets to the Seat Back Supports with the provided hardware.

NOTE: Do not fully tighten Bolts.



Locate the Rear Frame over the Sweater Basket as indicated, with the offset bend in the bottom facing to the rear and the Bent Short Legs at the top facing forward. Mount the Rear Frame to the Rear Frame Brackets with the provided hardware.

NOTE: Fully tighten Bolts.



PROCEED TO STEP 3

Yamaha G14-G22

Locate the Rear Frame over the sweater basket as indicated, with the offset bend in the bottom facing to the rear and the bent short legs at the top facing forward. Install the provided hardware where indicated.

NOTE: Depending on your Golf Car Model, you may have to remove an existing Bolt from the Sweater Basket. Fully tighten Bolts.




PROCEED TO STEP 3

Yamaha Drive

Remove the 2 Rear Screws that attach the Sweater Basket to the Seat Back Supports. Place the Rear Frame Brackets between the Sweater Basket and Seat Back Supports, with the shortest "leg" to the inside as indicated (A). Replace the screws back thru the Sweater Basket and Rear Frame Brackets. Locate Rear Frame over Sweater Basket with the offset bend in the bottom facing the Rear and Bent Short Legs at the top facing Forward. Mount the Rear Frame to the Rear Frame Brackets with the provided hardware.

NOTE: Fully tighten Bolts.

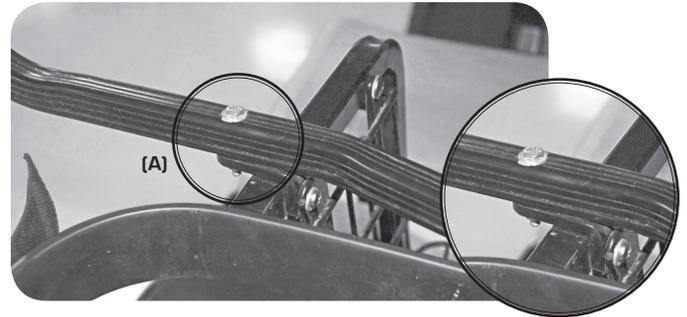

PROCEED TO STEP 3


STEP 3

INSTALL TOP


Mounting Front Brackets to Front Frame

Rest the Top on Front and Rear Frames, attach Front Frames with provided hardware as shown.

NOTE: Do not fully tighten Bolts.

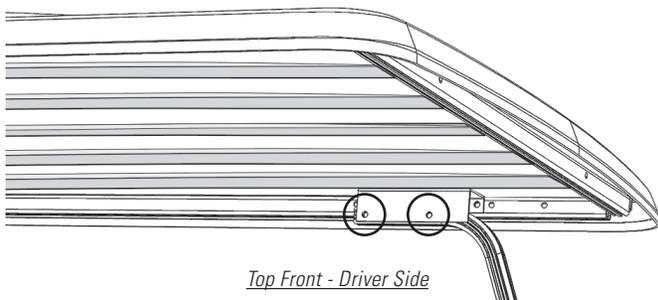

Mounting G14-22

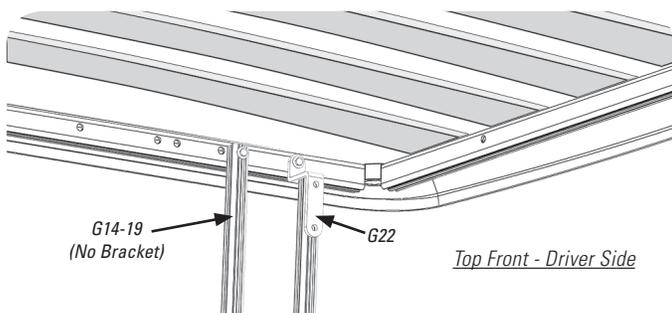


Mounting Single Front Bracket to Top


**If installing to TXT Bracket, insert 1/8" Spacer between Top Frame and Bracket.*

Rest the Top on Front and Rear Frames, attach Front Frames with provided hardware.


NOTE: Do not fully tighten Hardware.

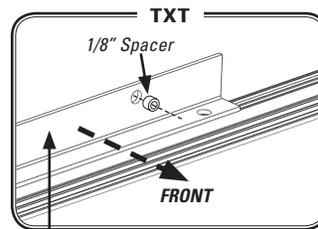

Top Frame mounts to Front Side of TXT Bracket

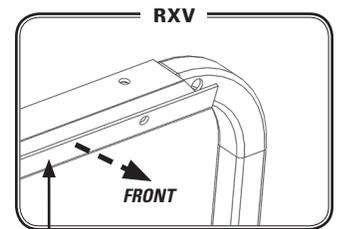


Top Frame mounts to Front Side of RXV Bracket

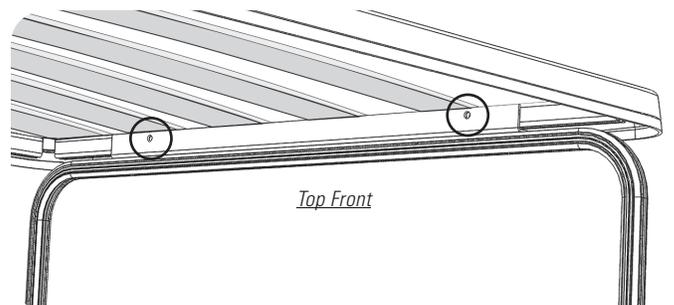


Mounting Rear Frames

Follow the Hole Diagram below for positioning. Align Rear Frames with selected holes in Top Frame and mount with provided hardware.

NOTE: Fully tighten all Hardware.

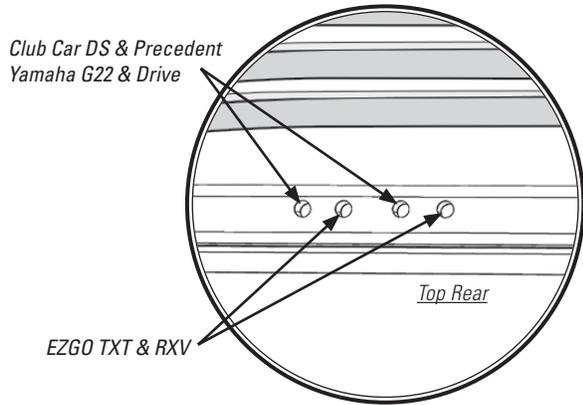

Club Car DS & Precedent / Yamaha G22 & Drive

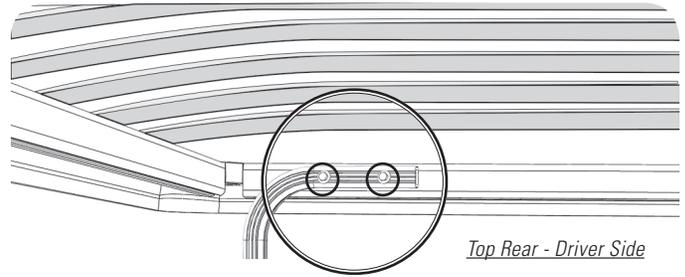

EZGO TXT & RXV

