



Cut off the mounting
basement of A-arm.

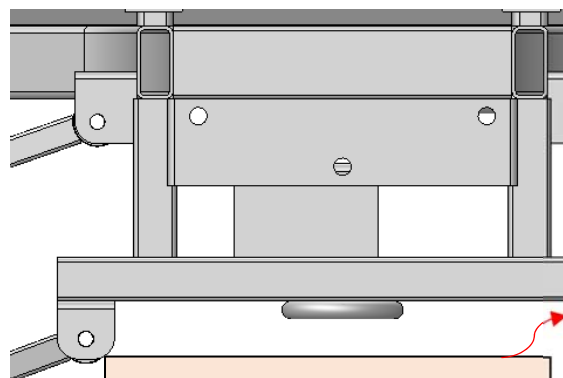

Reweld mounting basement of A-arm to
make the distance wider, then it will push
the tire out from the bottom. Then the
excessive camber angle will be rectified.

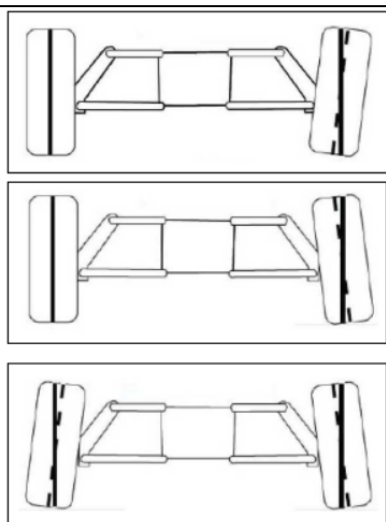


Wrong camber angle ,will cause unevenly wore
out



Wrong camber angle ,will cause unevenly wore
out



Wrong camber angle ,will cause unevenly wore
out

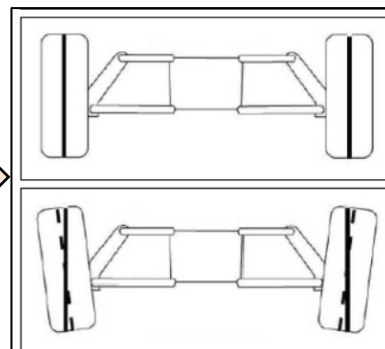

Right camber angle ,will not cause
unevenly wore out



Right camber angle ,will not cause
unevenly wore out

